




P40.17

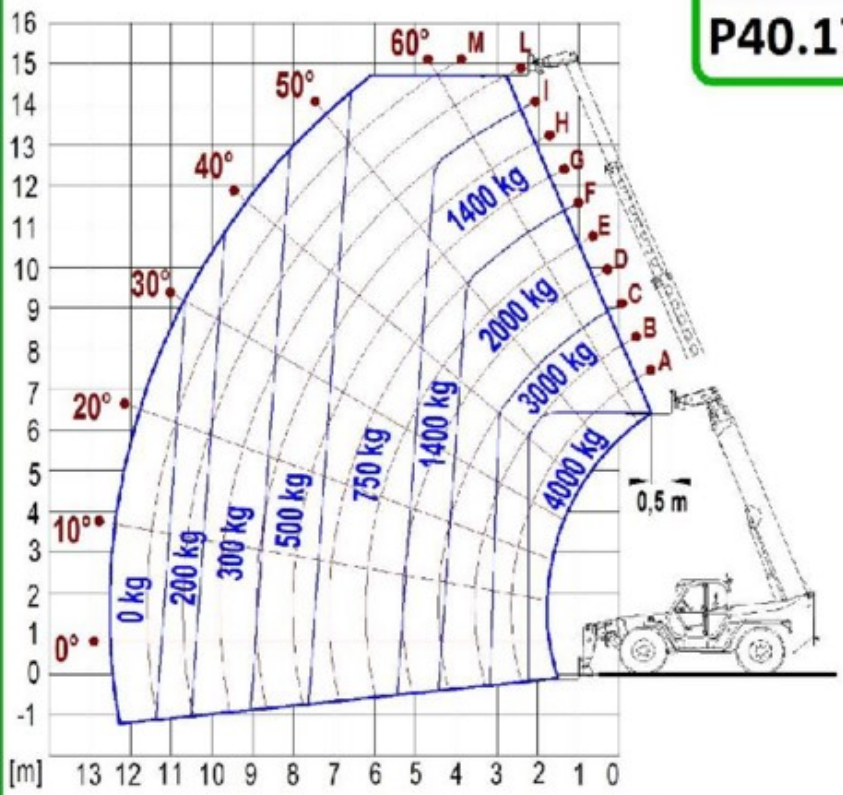


ISO 22915-14 / EN 1459 Tab. B

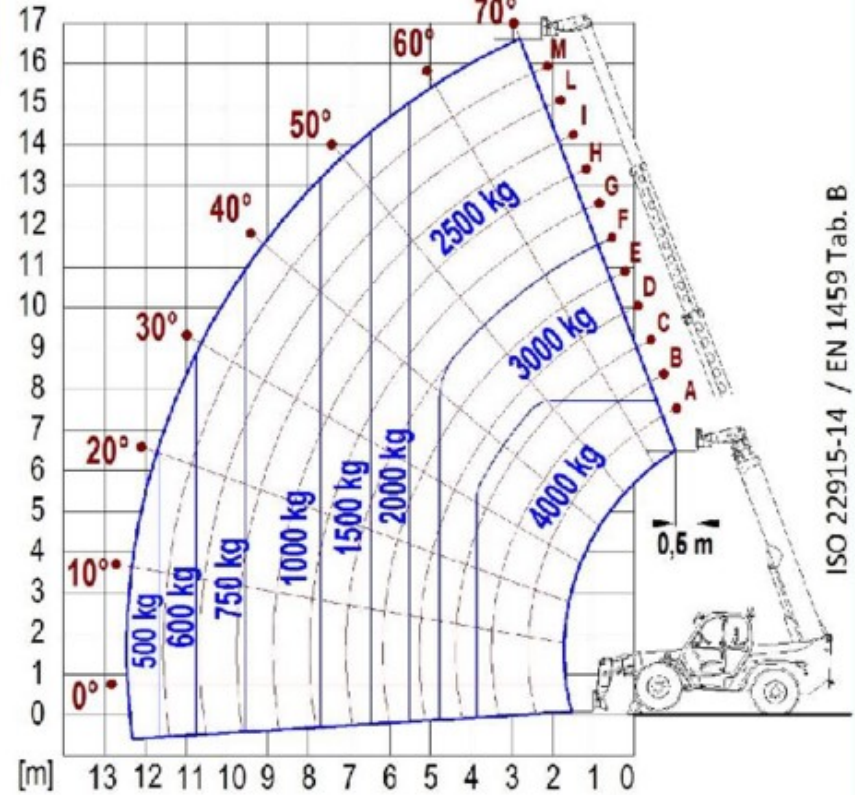


ISO 22915-14 / EN 1459 Tab. B




< 3 km/h




0 km/h




MAX 3° (5%)



MAX 3° (5%)




MAX 6° (10%)




MAX 4000 kg


300 mm




MAX 6° (9%)




MAX 6° (9%)




MAX 18° (36%)




MAX 3° (5%)




MAX 3° (5%)




MAX 6° (10%)



R1



A0301



MAX 12,5 m/s